


These installation instructions are valid with the above Ametrix styles.

Small, INDOOR P1R (Pendant, 1-way, Remote ballast) Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. Do not mount fixtures vertically.

Exploded view and part call-out

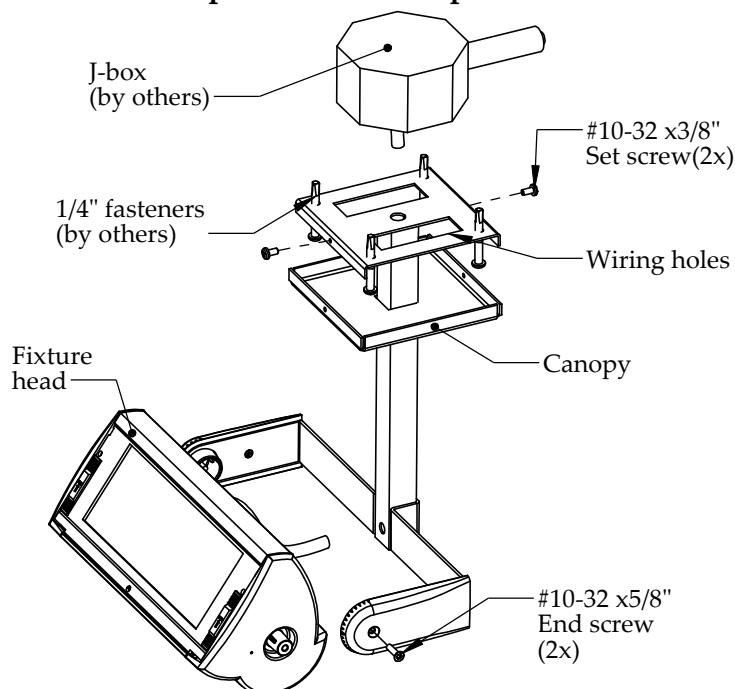


1

Mounting the fixture

1/4" fasteners (by others) (4x)


Use additional bracing around J-box to support fixture.

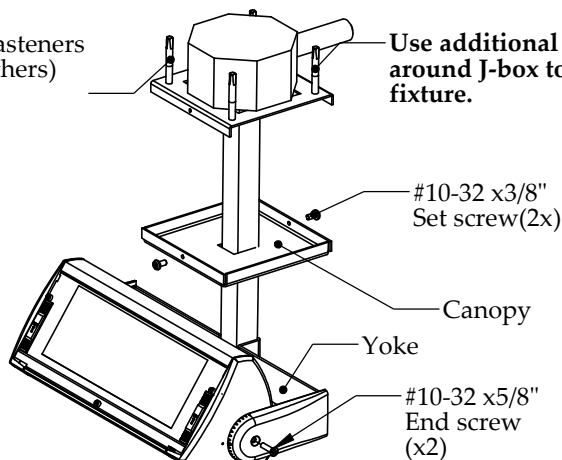

1. Using both #10-32 x5/8" end screws, secure fixture head to yoke on pendant and run fixture wire through pendant.
2. Remove both #10-32 x3/8" set screws and allow canopy to slide down pendant.
3. Run wires from pendant and j-box through wiring holes in mounting plate.
4. Using appropriate fasteners, secure fixture to ceiling. Use additional bracing around J-box to support fixture.

2


Wiring the fixture

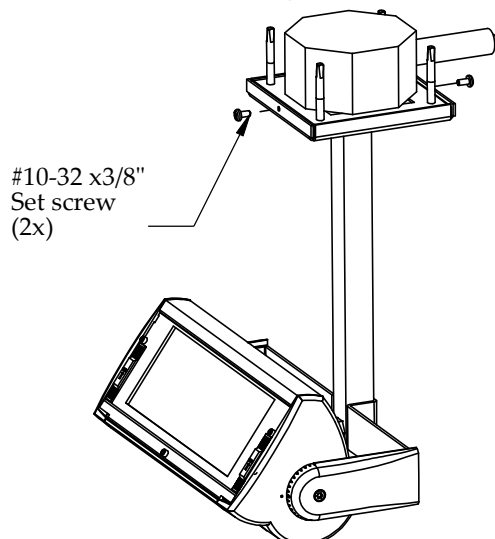




1. After securing fixture to ceiling, attach appropriate wires and ensure all connections are properly matched.
2. Push wire connections into j-box and cover mounting plate with canopy.
3. Secure canopy using both #10-32x 3/8" set screws.

3

Aiming the fixture

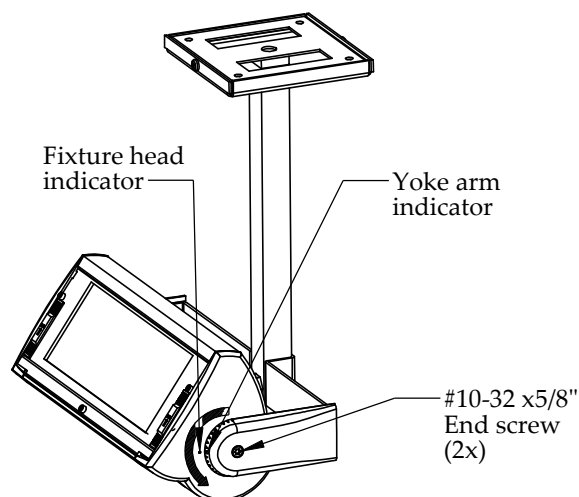

1. To aim fixture, loosen both #10-32 x5/8" end screws. When both indicators are lined up, the slope of the lens face is 40-degrees. Each subsequent notch is an additional +/- 10-degrees
2. When fixture head is rotated to desired angle, retighten end screws to secure the position.




These installation instructions are valid with the above Ametrix styles

Small, INDOOR P1R




(Pendant, 1-way, Remote ballast)
Visor and Non-Visor

Warning: Before starting any work ensure that all sources of power are turned off. All work must meet local/national codes and be performed by a certified electrician. **Do not** mount fixtures vertically.

Mounting Plate Dimensions In [mm]

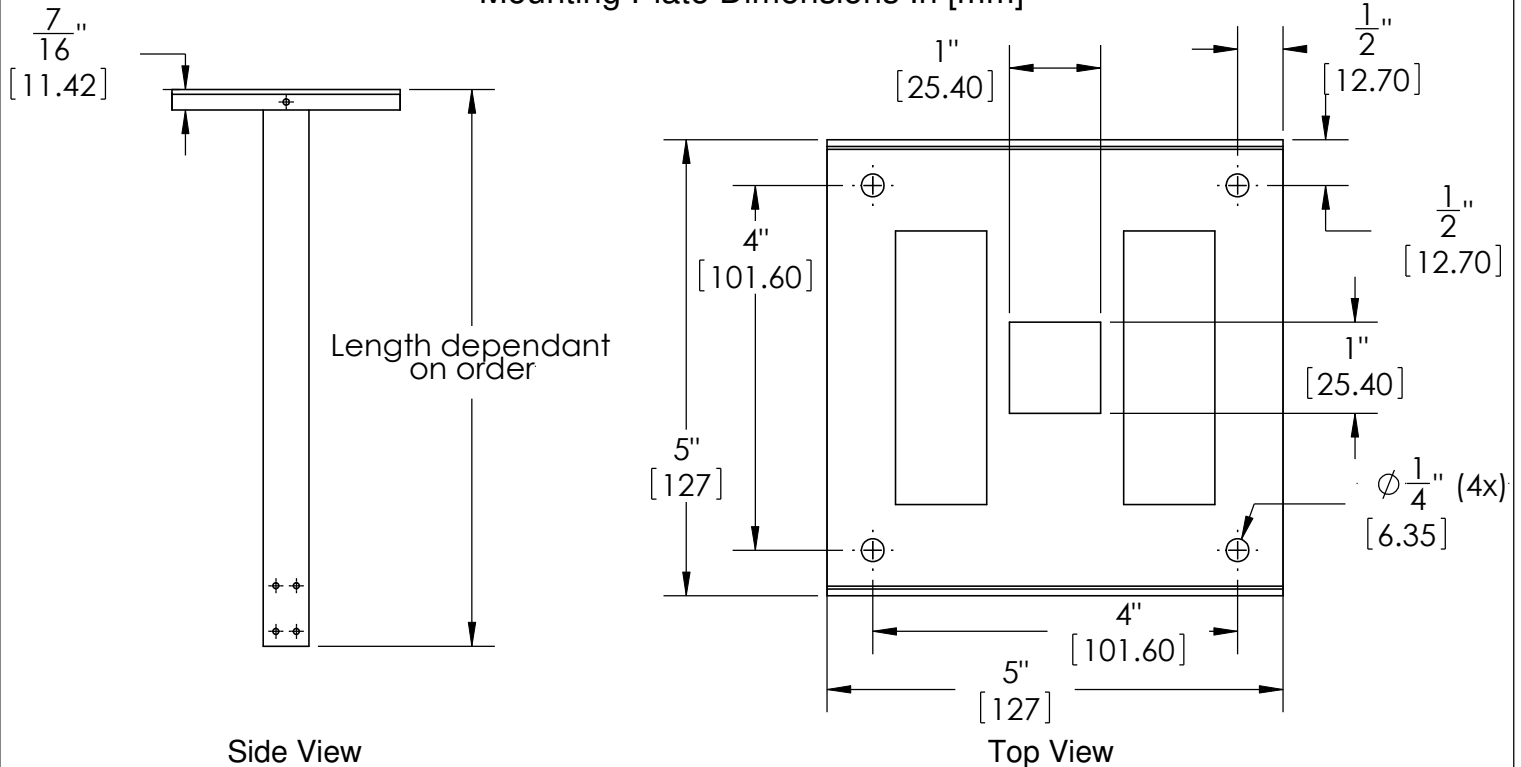

Lamping Size Chart (lamps provided by others)

FIXTURE SIZE (inches/ mm)	WATTAGE	# OF LAMPS	LAMP TYPE	LAMP DESCRIPTION	LAMP (not to scale)
10 3/4 / 273.05	39 W	1	T6	Ceramic Metal Halide	
12 3/4 / 323.85	70 W	1	T6	Ceramic Metal Halide	
12 3/4 / 323.85	150 W	1	T6	Ceramic Metal Halide	
12 3/4 / 323.85	26 W	1	4-Pin Triple Tube	Compact Fluorescent	 Use only GE or Sylvania CFL lamps
12 3/4 / 323.85	32 W	1	4-Pin Triple Tube	Compact Fluorescent	
12 3/4 / 323.85	42 W	1	4-Pin Triple Tube	Compact Fluorescent	
10 3/4 / 273.05	100 W	1	T4	Halogen (Single Ended)	
12 3/4 / 323.85	150 W	1	T4	Halogen (Single Ended)	
12 3/4 / 323.85	250 W	1	T4	Halogen (Single Ended)	